

MOUNTING INSTRUCTIONS:

1. PREPARE LOCK STILE PER TEMPLATE NO. 10-935 DRILL CYLINDER MOUNTING HOLES IF REQUIRED.
2. LOCATE CENTERLINE OF CYLINDER ON EXTERIOR OF DOOR AND DRILL IF REQUIRED.
3. TRIM TAIL PIECE TO FIT INTO PANIC DRIVE BUSHING ASSEMBLY.
4. MOUNT CYLINDER AND SECURE WITH MOUNTING SCREWS (SUPPLIED BY LOCK MFG.) IF TRIM IS REQ'D PREP. PER 10-997
5. LOCATE MOUNTING HOLE ON INACTIVE STILE DRILL & TAP 1/4-20 THDS. 40*(1016) FROM BTM. OF DOOR.
6. PANIC ATTACHMENT
7. REMOVE FRONT AND REAR END BASE COVERS BY RELEASING 6-32 x 3/16(5) FLAT HD. SCREWS. SECURE ACTIVE END OF PANIC BY INSTALLING 2 EACH 12-24x3/4(19) FLAT HD.M.S.
8. SECURE INACTIVE END WITH SINGLE 1/4-20x1/2(13) ROUND HD. M.S. (PHIL.) WITH SEWS THROUGH INACTIVE BASE PLATE. PROCEED BY RE-INSTALLING BASE COVERS ON EACH END OF PANIC BASE.
9. TO INSTALL STRIKE LOCATE 10-24 TAPS ON ACTIVE STILE (2 PLACES), MOUNT AND SECURE STRIKE. (REF. DETAIL "S")
10. CHECK OPERATION OF ALL PARTS INCLUDING CYLINDER IF BEING USED TO ASSURE PROPER OPERATION.


DOGGING INSTRUCTIONS:

TO DOG- INSERT HEX. KEY TURN CLOCKWISE UNTIL IT STOPS. FULLY DEPRESS TOUCH BAR THEN RELEASE.

TO UNDOG- INSERT HEX KEY TURN COUNTERCLOCKWISE UNTIL IT STOPS. TOUCH BAR WILL RELEASE.

MODEL 1295

FUNCTIONAL CYLINDERS	A	DOOR OPENING	L
ILCO	36"(914)	33"(838)	
YALE	48"(1219)	45"(1143)	
CORBIN			
SCHLAGE			
RUSSWIN			
WELCH			
KEIL			
SARGENT			

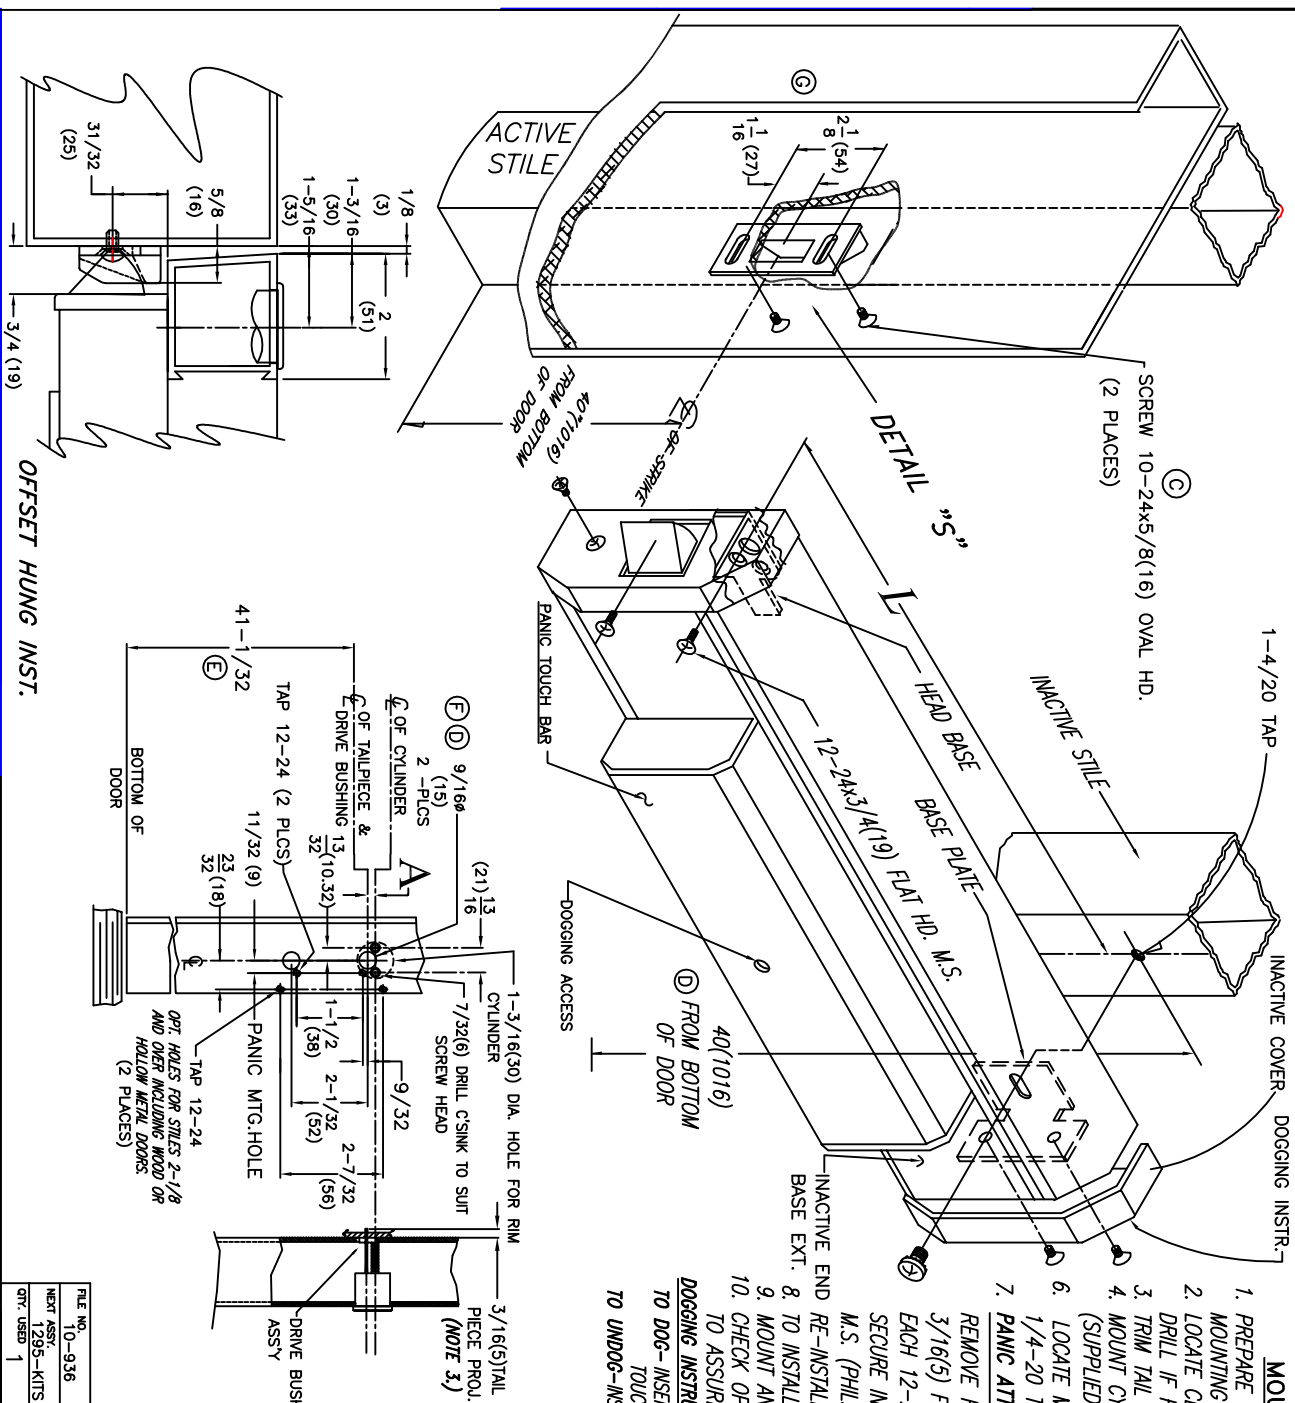

FILE NO. 10-936	FINISH NONE	INSTALLATION GUIDE	SHEET 1 OF 1 SHEETS
NEXT ASSY. 1295-KITS	HEAT TREAT	1295 RIM DEVICE	DWG. NO. 10-936 G
QTY. USED 1		"C" TYPE STRIKE	

G 6.25.03	2-1/8	WAS 1-13/16	ENH 625	
F 06/21/01	ADD 41-1/32	9/16 WAS 19/32	DM	ENH 1502
E 06/21/01	ADD 41-1/32	DM		ENH 1502
D 05/31/00	40 WAS 37	ADD 2ND 19/32 HOLE		ENH 1377
C 04/17/00	12-24 CALLOUT WAS 10-32			ENH 1366
B 11/1/99	12-24 WAS 8	ENH 1366		
A 04/17/00	12-24 WAS 8	ENH 1366		
UNLESS OTHERWISE SPECIFIED				
DECIMAL DIMENSIONS XXX ± .005				
ANGULAR ± 9° FRACTIONAL ± 1/64				
MATERIAL NONE				
SCALE NONE				

JACKSON CORPORATION
3447 LINCOLN PARKWAY, N.E.
ALBANY, OREGON 97321