



ROUTING INSTRUCTIONS:

- VIEW #4

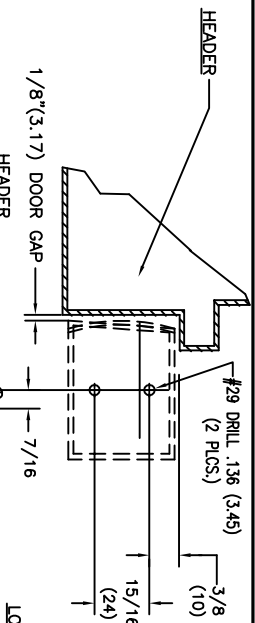


LOOKING UP AT HEADER

DRILL #10(.193 DIA.) 5mm 2 PLACES
THIS SIDE. DRILL & C'SINK
OPPOSITE SIDE FOR 8-32x1 5/16 (33)
FHMS (2 PLACES)

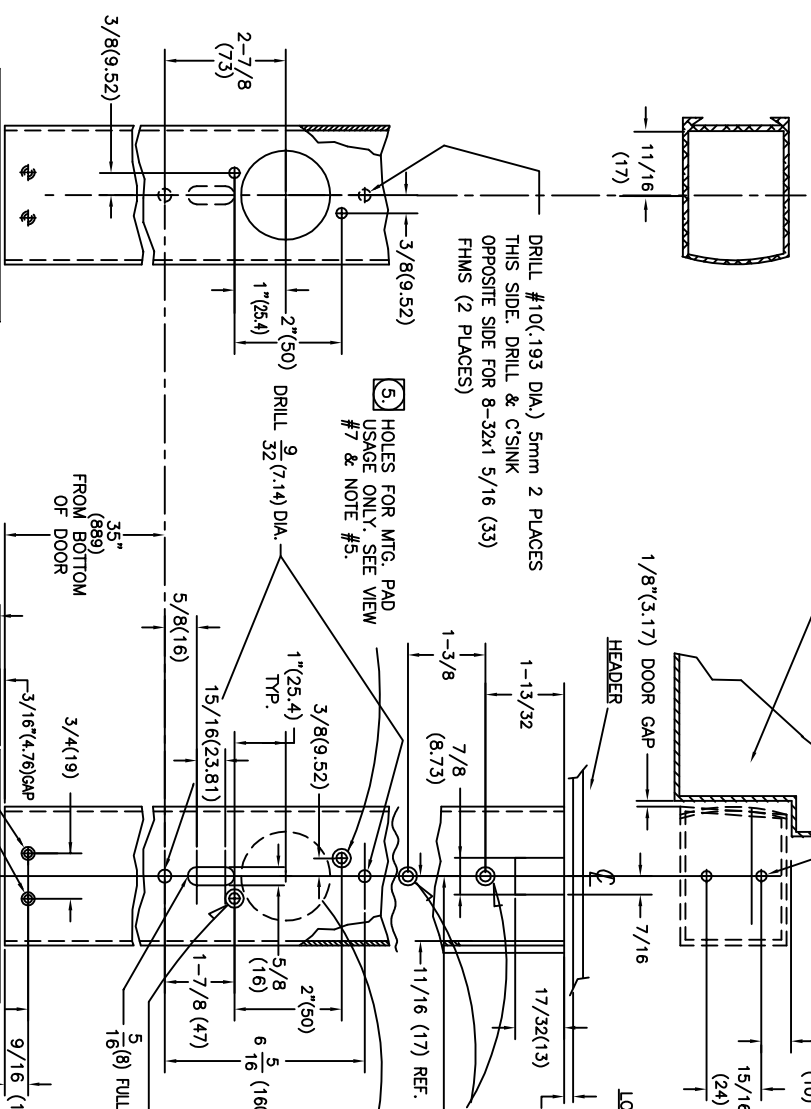

WHEN USING 86 LOCK ONLY
DRILL 1-13/32 (35) DIA. OPPOSITE
SIDE.

DRILL & TAP -
1/4-20 THREADS

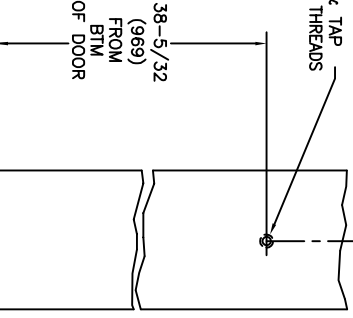

WHEN USING (86 LOCK) ONLY
DRILL & C'SINK FOR #8 FHMS
FRONT SIDE. DRILL CLEARANCE
FROM OPPOSITE SIDE 2 PLACES

38-5/32
(969)
FROM
BTM
OF DOOR

VIEW #7



THRESHOLD 1/2"(12.7)–

VIEW #1

FLOOR LEVEL


VIEW #2

HINGE SIDE VERTICAL STILE
PANIC SIDE

OUTSIDE (LOCK SIDE) OF ACTIVE
DOOR STILE SHOWING PREP.
WHEN USING #86 LOCK CYLINDER
MOUNTING PAD.

DRILL & C'SINK FOR
10-32x1/2(12.7) SELF-TAP SCR.
(2 PLCS.)

MEASURED FROM DOOR STOP;
SUSPENSOR OR WEATHER
STRIP WHEN USED.

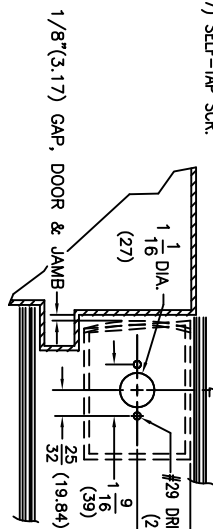

VIEW #3

LOOKING DOWN ON THRESHOLD

DOOR OPENING	"L"
36" (914)	33-13/32" (848)
42" (1066)	39-13/32" (1009)
48" (1219)	45-13/32" (1162)

FILE NO.	10-950-2		FINISH	MEAN TREAT	
W2085-KITS					
QTY. USED					
C 06/07/00 ADD NOTES FOR OUTSIDE TRIM B 12/14/99 ADD TABLE DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED DECIMAL DIMENSIONS .XX ± .010 DECIMAL DIMENSIONS .XXX ± .005 ANGULAR ± .01° OR FRACTIONAL ± 1/64° MATERIAL			APPROVALS DATE ECN1326 ECN1384 RM RM		
ROUTING INSTRUCTIONS			ROUTING INSTRUCTIONS		
NONE			NONE		
SHEET 2 OF 2 SHEETS			SHEET 2 OF 2 SHEETS		
DRAW. NO. 10-950-2 C			DRAW. NO. 10-950-2 C		
2085 CYR PANIC DEVICE			2085 CYR PANIC DEVICE		