



GLASS FABRICATION TEMPLATE FOR THE Z-SERIES ROUND TYPE RADIUS BASE CLAMPS FOR 1/4" AND 5/16" GLASS

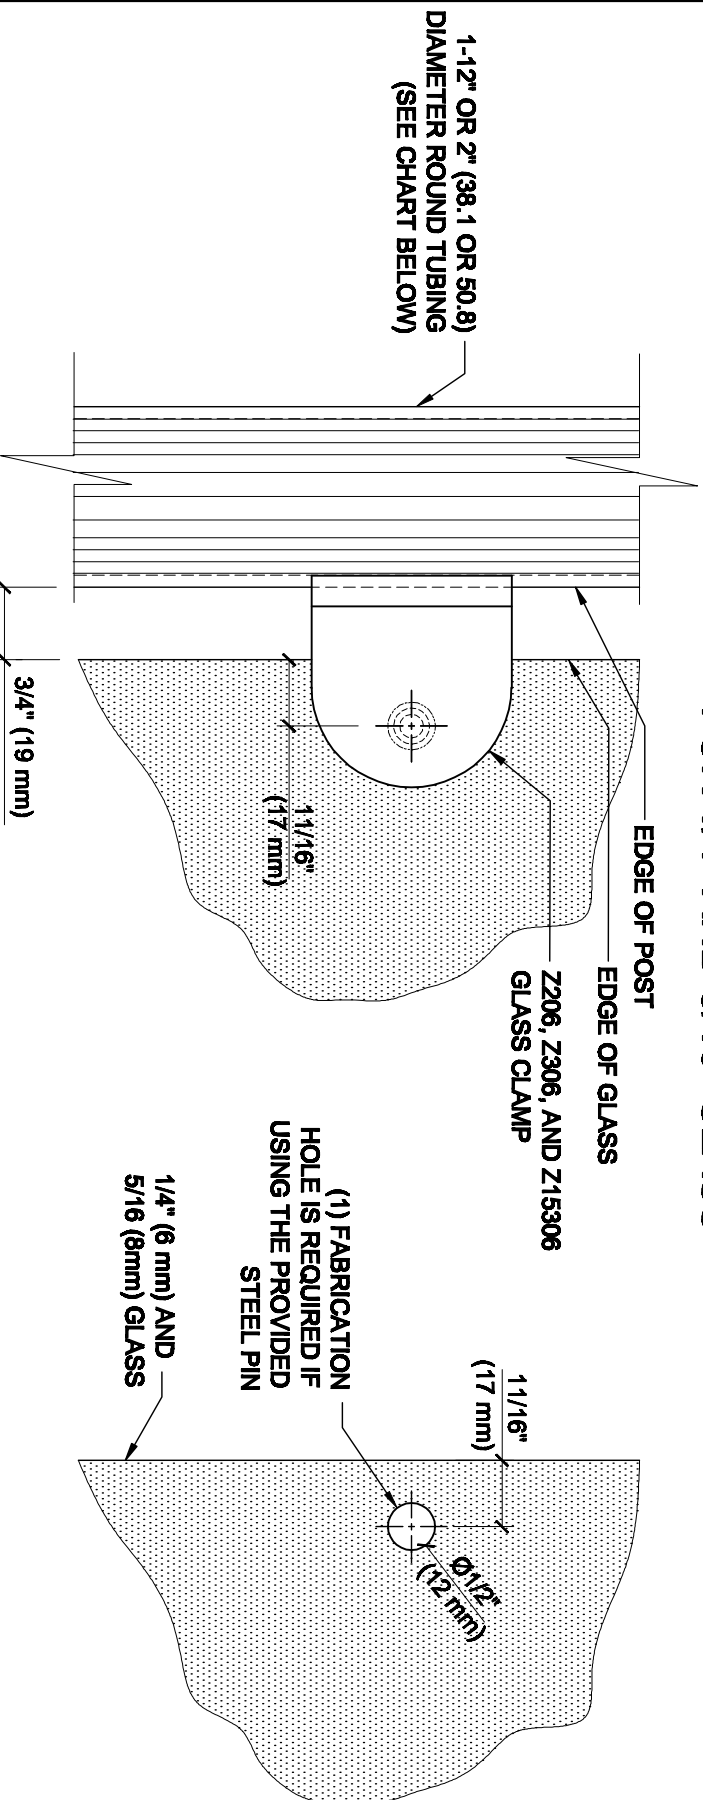

1-1/2" OR 2" (38.1 OR 50.8)
DIAMETER ROUND TUBING
(SEE CHART BELOW)

GLASS FABRICATION TEMPLATE USED FOR:

CATALOG NUMBER	TUBE DIA
Z206BR	2" (50.8 mm)
Z206CH	2" (50.8 mm)
Z206SC	2" (50.8 mm)
Z206BN	2" (50.8 mm)
Z206GP	2" (50.8 mm)
Z206W	2" (50.8 mm)
Z306BS	2" (50.8 mm)
Z306PS	2" (50.8 mm)
Z15306BS	1-1/2" (38.1 mm)
Z15306PS	1-1/2" (38.1 mm)

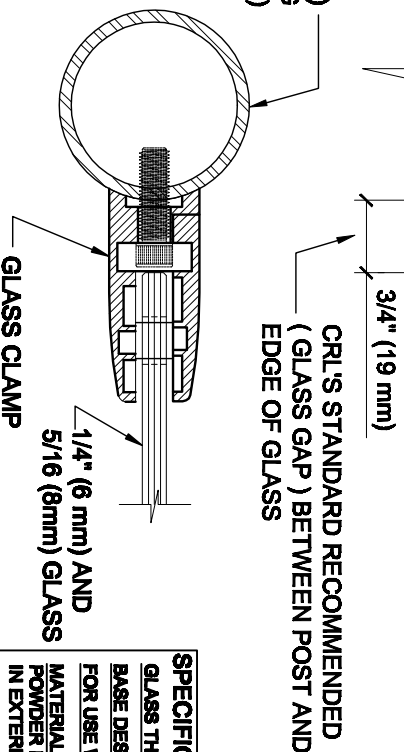

SPECIFICATIONS:

GLASS THICKNESS: MODELS FOR 1/4" AND 5/16" (6 TO 8 mm) GLASS.

BASE DESIGN: RADIUS BACK

FOR USE WITH: 1-1/2" OR 2" (38.1 OR 50.8 mm) DIAMETER ROUND TUBING (SEE CHART).

MATERIAL: CHOICE OF ZINC CONSTRUCTED OR STAINLESS STEEL. STAINLESS STEEL OR POWDER PAINTED ZINC CLAMPS ARE RECOMMENDED FOR MORE DURABILITY IN EXTERIOR APPLICATIONS.

GLASS FABRICATION: FOR 1/4" (6 mm), 5/16" (8mm), THICK GLASS, 1/2" (12mm) DIAMETER HOLE REQUIRED IF USING PROVIDED STEEL PIN FOR GLASS SUPPORT

INCLUDES: RUBBER GASKETS AND STEEL PIN (FOR OPTIONAL USE) WITH GROMMET.

ALWAYS USE DIMENSIONS SHOWN ON THE PLAN.
DO NOT SCALE OR DIMENSION ACTUAL DRAWING
TO ENSURE ACCURACY