

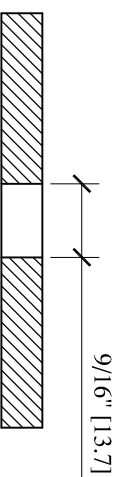
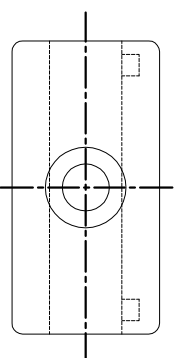
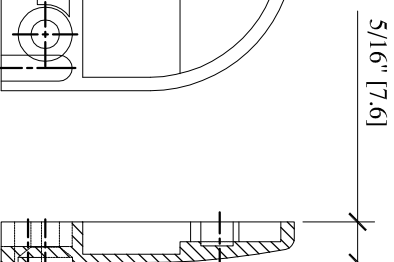
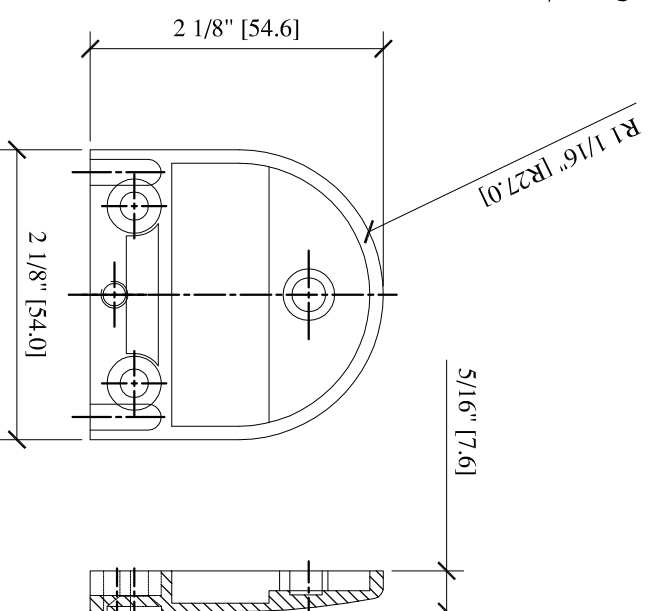
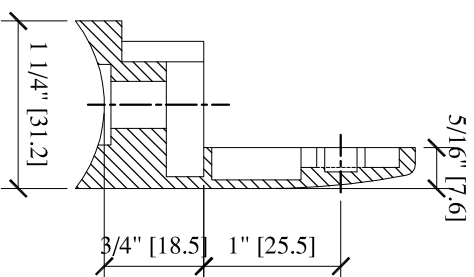


Z-SERIES ROUND TYPE
RADIUS BASE ZINC CLAMPS
FOR 1/2" GLASS
CAT NO. Z212xx

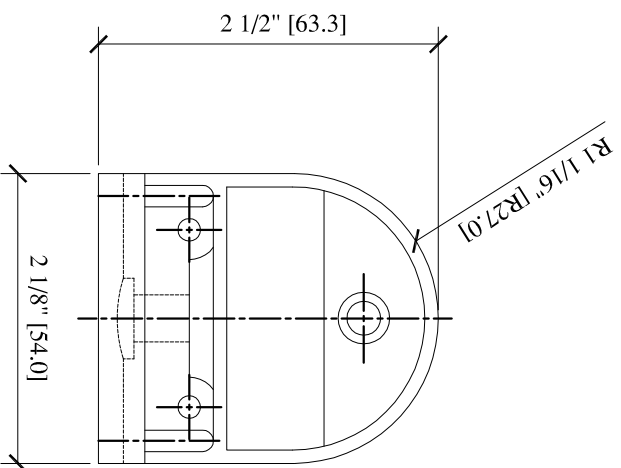


GLASS FABRICATION

GLASS FABRICATION TEMPLATE FOR THE Z-SERIES ROUND TYPE RADIUS BASE CLAMPS FOR 1/2" (12 mm) GLASS

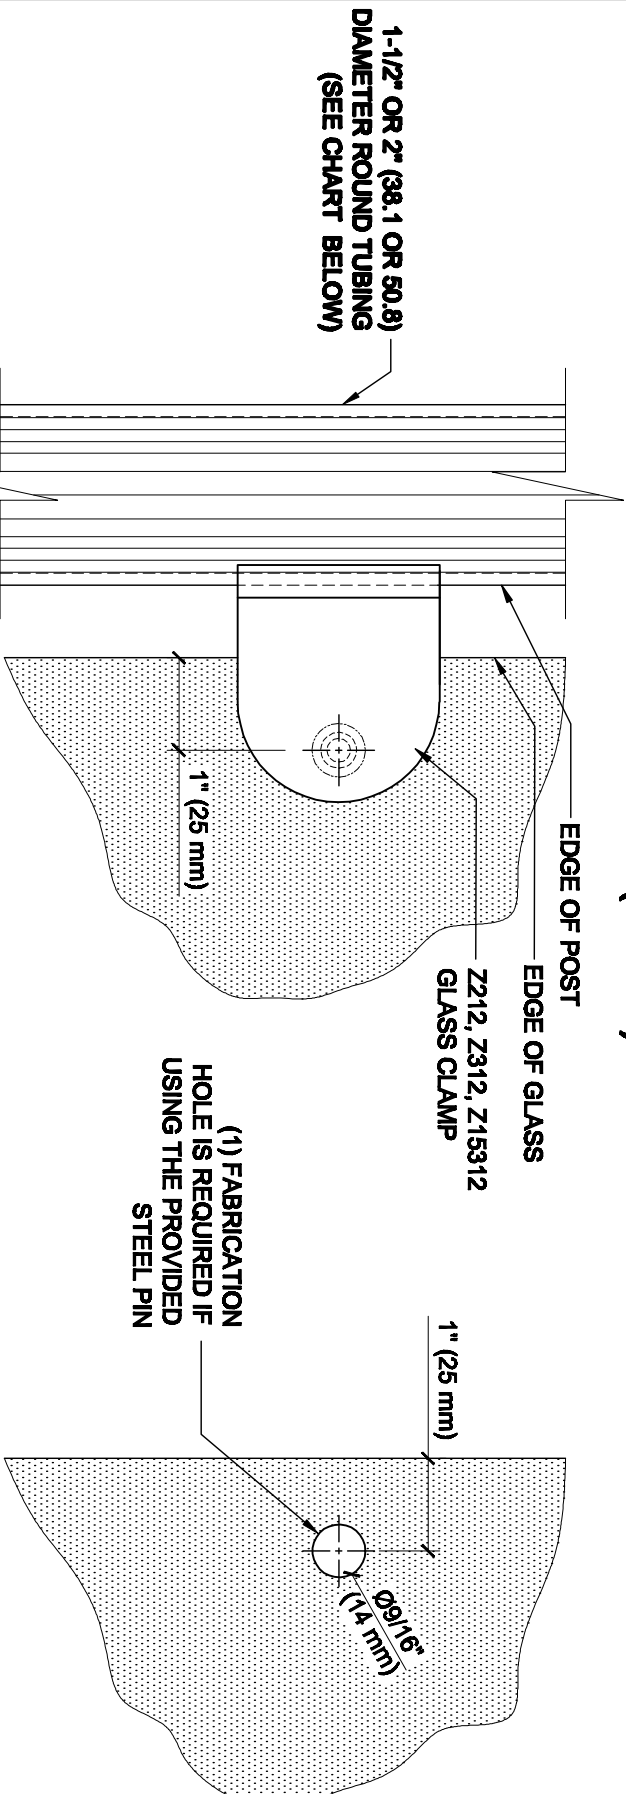

1-1/2" OR 2" (38.1 OR 50.8)
DIAMETER ROUND TUBING
(SEE CHART BELOW)

3/4" (19 mm)
CRL'S STANDARD RECOMMENDED
(GLASS GAP) BETWEEN POST AND
EDGE OF GLASS

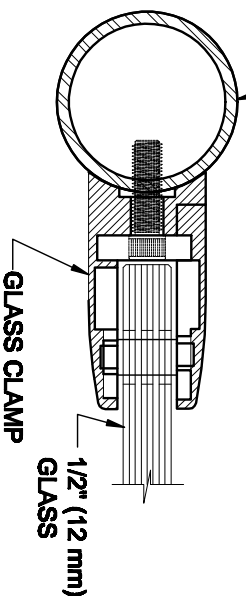

ALWAYS USE DIMENSIONS SHOWN ON THE PLAN.
DO NOT SCALE OR DIMENSION ACTUAL DRAWING
TO ENSURE ACCURACY

SPECIFICATIONS:

- GLASS THICKNESS: MODELS FOR 1/2" (12 mm) GLASS.
- BASE DESIGN: RADIUS BACK
- FOR USE WITH: 1-1/2" OR 2" (38.1 OR 50.8 mm) DIAMETER ROUND TUBING (SEE CHART)
- MATERIAL: CHOICE OF ZINC CONSTRUCTED OR STAINLESS STEEL, STAINLESS STEEL, OR POWDER PAINTED ZINC CLAMPS ARE RECOMMENDED FOR MORE DURABILITY IN EXTERIOR APPLICATIONS.
- GLASS FABRICATION: FOR 1/2" (12mm) THICK GLASS : 8/16" (14mm) DIAMETER HOLE REQUIRED IF USING PROVIDED STEEL PIN FOR GLASS SUPPORT.
- INCLUDES: RUBBER GASKETS AND STEEL PIN (FOR OPTIONAL USE) WITH GROMMET.

GLASS FABRICATION TEMPLATE USED FOR:

CATALOG NUMBER	TUBE DIA
Z212BR	2" (50.8mm)
Z212CH	2" (50.8mm)
Z212SC	2" (50.8mm)
Z212BN	2" (50.8mm)
Z212GP	2" (50.8mm)
Z212W	2" (50.8mm)
Z312BS	2" (50.8mm)
Z312PS	2" (50.8mm)
Z15312BS	1-1/2" (38.1mm)
Z15312PS	1-1/2" (38.1mm)