

Diagram illustrating the recommended gap between the post and the glass edge. The gap is labeled as 3/4" (19 mm). The text indicates this is the CRL's standard recommended (glass gap) between post and edge of glass.

CATALOG NUMBER

Z812CH

Z812BN

Z812W

Z912BS





Z912PS

A cross-sectional diagram of the glass assembly. It shows a thick glass pane, labeled "1/2" (12 mm)", held between two metal components. The component on the left is labeled "GLASS CLAMP". The entire assembly is mounted within a larger frame structure.

INCLUDES: RUBBER GASKETS AND STEEL PIN (FOR OPTIONAL USE) WITH GROMMET.

CAT. NO:	(SEE CHART)	DATE:	04/16/08
FILE NAME:	Z812-G18 Fab	SCALE:	N.T.S.
DRAWN BY:	R.A.	CHECKED BY:	C.H.
			SHT

Z-SERIES SQUARE TYPE
FLAT BASE ZINC CLAMPS
FOR 1/2" GLASS
CAT NO. Z912XX

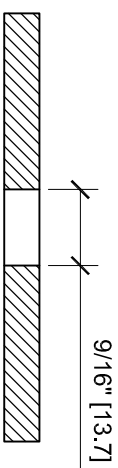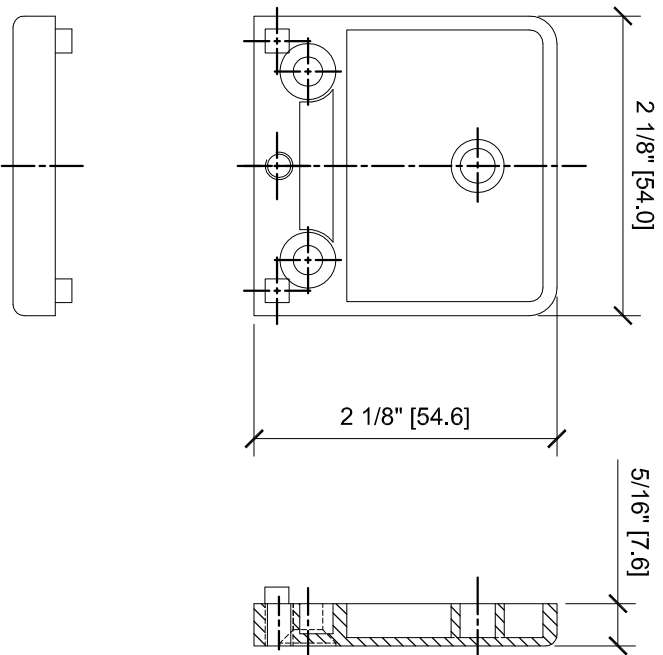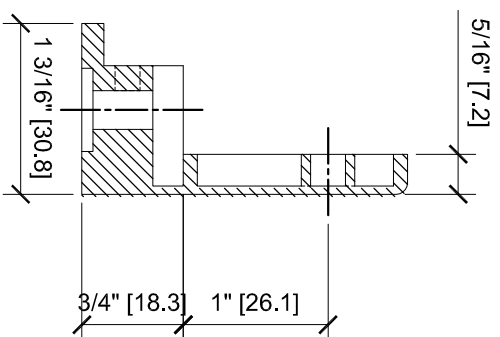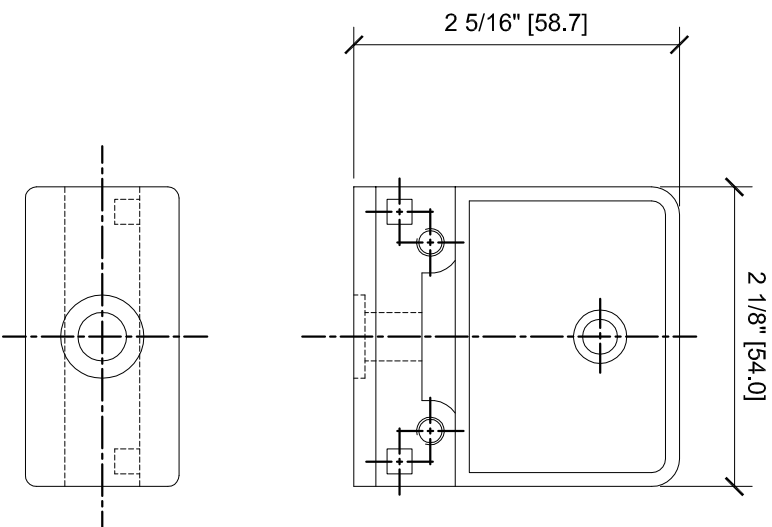

GLASS FABRICATION